
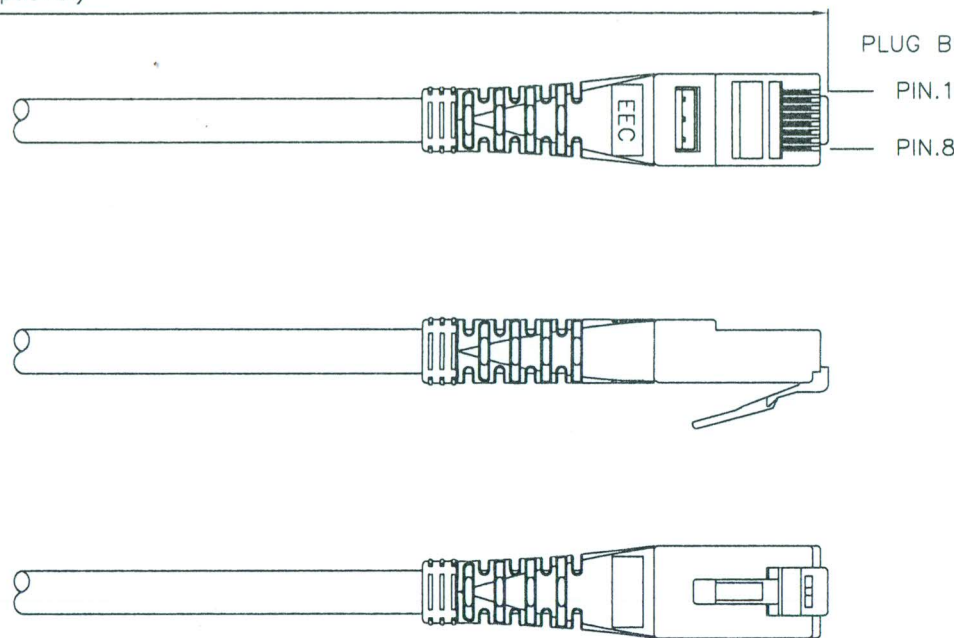


Total length (optional)

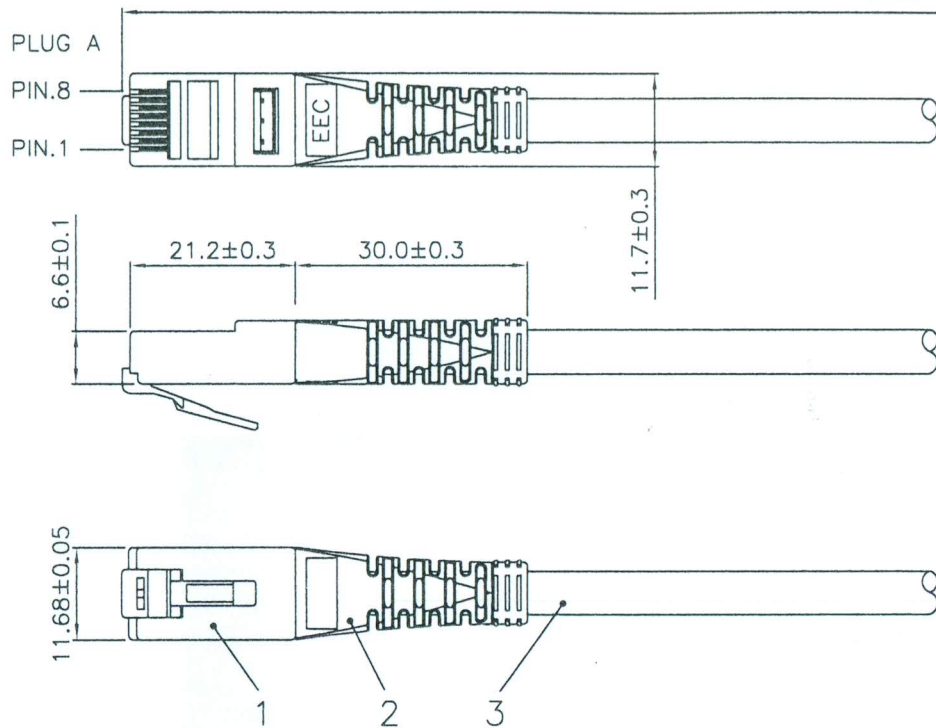

Specification :

1. RJ45 Plug:
 - 1-1. Housing: 1 Row, Polycarbonate, UL 94V-2, transparent color.
 - 1-2. Wire Bar: 1 Row, OD 0.8mm, Polycarbonate, UL 94V-2, transparent color.
 - 1-3. Contact Pin: Phosphor Bronze material.
 - 1-4. Contact Pin finished: Minimum Flush micro-inches Gold and Nickel Plated on surface contact area.
 - 1-5. The structure complied with the IEC60603-7 requirement.
2. moldign: 70P/PVC material
3. Cable:
 - 3-1. C6 U/UTP 4 twisted pair. The Cable performance complied with the ANSI/TIA 568-C.2 requirement.
 - 3-2. Jacket: PVC material, OD 5.3 ± 0.2 mm
 - 3-3. Conductor: 26AWG bare Copper.
 - 3-4. Isolation: HDPE
 - 3-5. Isolation Cross Bar for 4 pairs : PE.
4. The performance complied with the ANSI/TIA 568C.2 C6 Patch Cord Channel the maximum length up to 20meters.

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	23.MAR.2017	LHL
	CHECK	23.MAR.2017	YUAN
	APPROVAL	23.MAR.2017	YTY
		DATE	NAME
SCALE	1/1 (A4)	UNIT	mm
		DES.: C6 U/UTP molding Patch Cord	
	DRAWING NO.	SCABC020132XXXX99001 MP170321-001 EEC(SA1)	
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1

